

STRIPS AND BLEACHES

DEFATS

EMPTIES

DEPILATES

SPLITS

GRINDS

FILTERS

DISCHARGES

Heads and feet*.

For an uncompromising result.



EGX

SERIE

Why choose the MCM EGX depilating machine ?

MCM has been a manufacturer, integrator and process consultant since 1990.

The **EGX** range is made to epilate your products (heads and feet of calves, feet of cattle, pigs and sheep, complete piglets) without comprising on the finish.



Its proven design is made to get an efficiency process and easy maintenance, thanks to its unique system of removable abrasive plates*¹.



The **EGX** stripper is fully tuned to YOUR needs. This means that many options and unique adaptations are available to boost your process and its ergonomics.




Its compact size makes for easy integration into your processing line with low maintenance operation.



Consumption (electricity, air and waters) is optimised for maximum operating **cost reduction**.



Thanks to the **Press & Process** mode, just one press*² starts a complete stripping cycle, from the loading of your products*³ through to discharge.

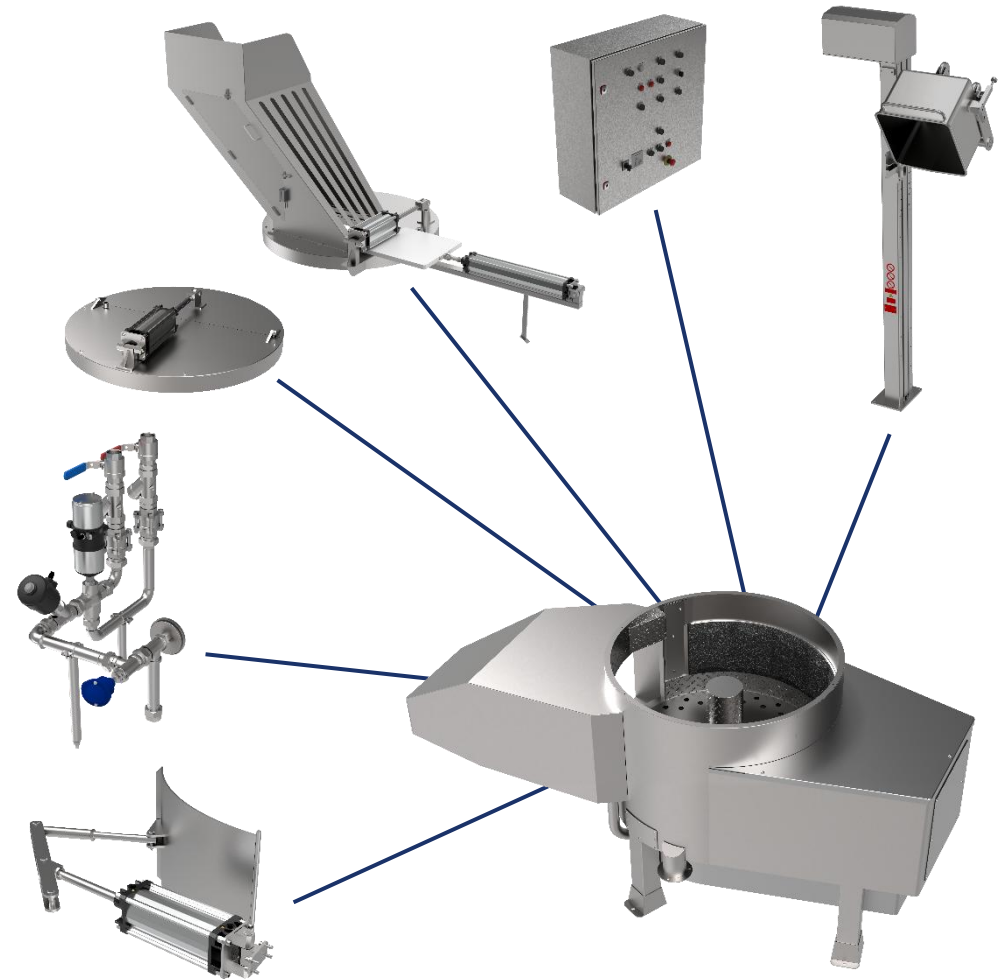



Tailored to your needs.

Since your needs are special to us, your **EGX** is tailored, modified and equipped by our teams.


From the automated buffer hopper to the lift and the controlled mixing valve*⁴, we design the machine that matches your requirements.

*¹depending on the processed product. *²requires the "automation" option. *³requires the "lift" option. *⁴ please make enquiries with us for more information.

Technical specifications

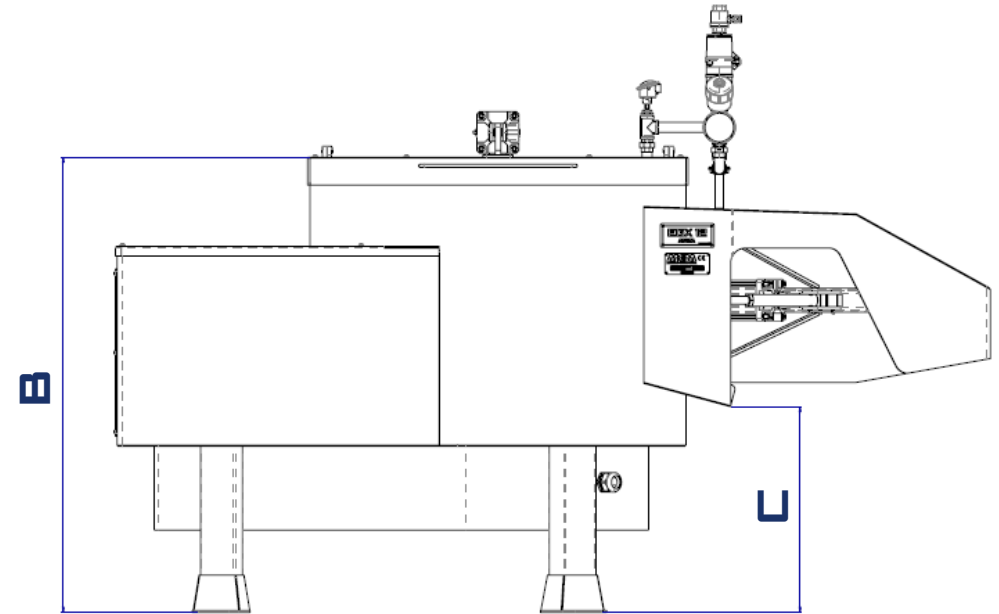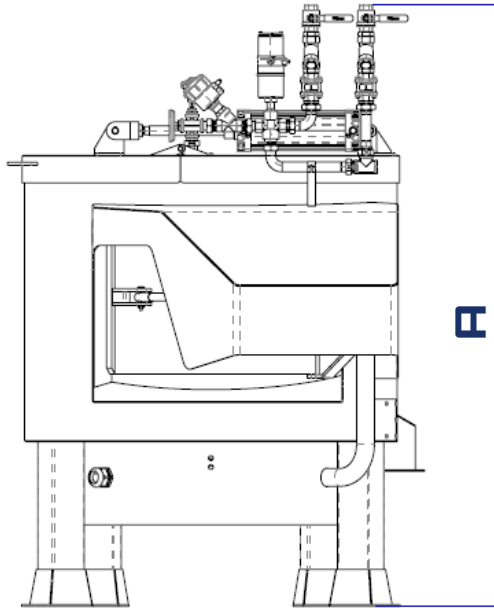

	EGX08	EGX12	EGX15
A* ¹	2050	2200	2200
B* ¹	1530	1680	1680
C	On request		
D	2500	2900	3250
E	1160	1410	1710
F	1020	1270	1520
Cattle feet yield (/h)	90	240	360
Sheep feet yield (/h)	1000	1800	2400
Pig feet yield (/h)	840	1800	2700
Calf feet yield (/h)	150	405	540
Calf heads yield (/h)	15	60	90
Lamb heads yield (/h)	60	240	400
Complete piglet yield (/h)	55	105	135
Motor power (KW)	± 5	± 8	± 11
Cold water consumption (cattle feet, l/h)* ²	1050	1350	1350
Hot water consumption (cattle feet, l/h)* ²	2100	2700	2700

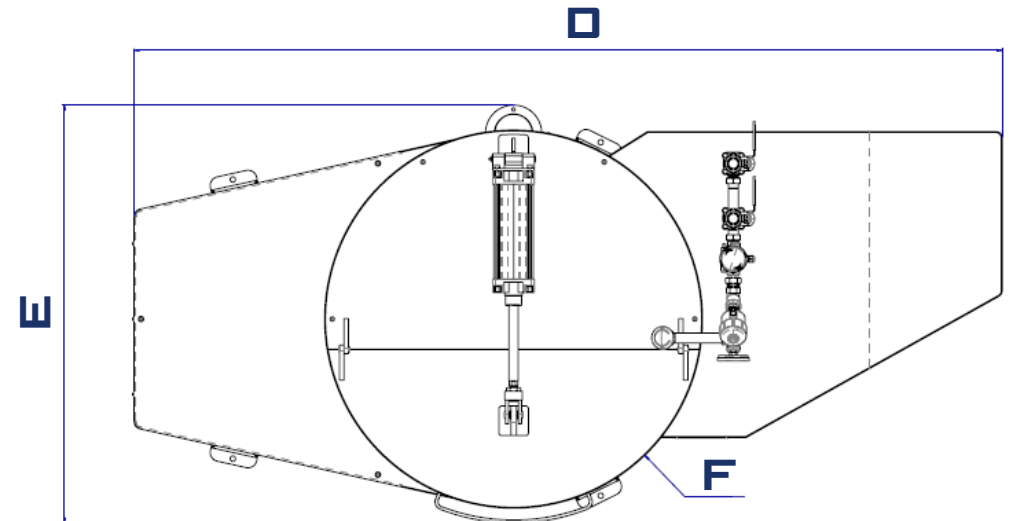

*¹ For a height C of 850mm. Dimensions A and B depend on determined dimension C (product exit height). *² For your guidance, this depends on the down time between cycles.



For more informations, please contact us :



2 rue la Bargette
42500 Le Chambon-Feugerolles
FRANCE



+33(0) 477 305 084



contact@mcmecal.fr



mcmecal.fr

MCM, expertise and innovation in 5th quarter processing

